PHYSICAL CHARACTERISTICS				
RWY	DIRECTION MAG	BEARING STRENGTH	SURFACE	THR COORDINATES
05	049°	PCN 62/F/B/W/T	ASPH	530640N 0063339E
23	229°	PCN 62/F/B/W/T	ASPH	530730N 0063525E

AD ELEV 18

TWR	118.705	Eelde
	119.705	Tower
	121.705	Eelde Delivery
ATIS	133.555	Eelde Information

VAR 3° E (2025)

ANNUAL RATE OF CHANGE 10' E

DIRECTIONS ARE MAGNETIC
ELEVATIONS IN FEET AMSL
DIMENSIONS IN METRES

LEGEND

- ATC SERVICE BDRY
- SAFETY LINE IN CASE OF CODE E ACFT
- RWY HOLDING POSITION MARKING PATTERN A
- S1 — RWY HOLDING POSITION NAME
- RWY GUARD LIGHTS
- 36 — MAX WING SPAN
- HOLDING POINT

SCALE 1 : 12 500

metres 0 100 200 300 400 500
feet 0 500 1000 1500

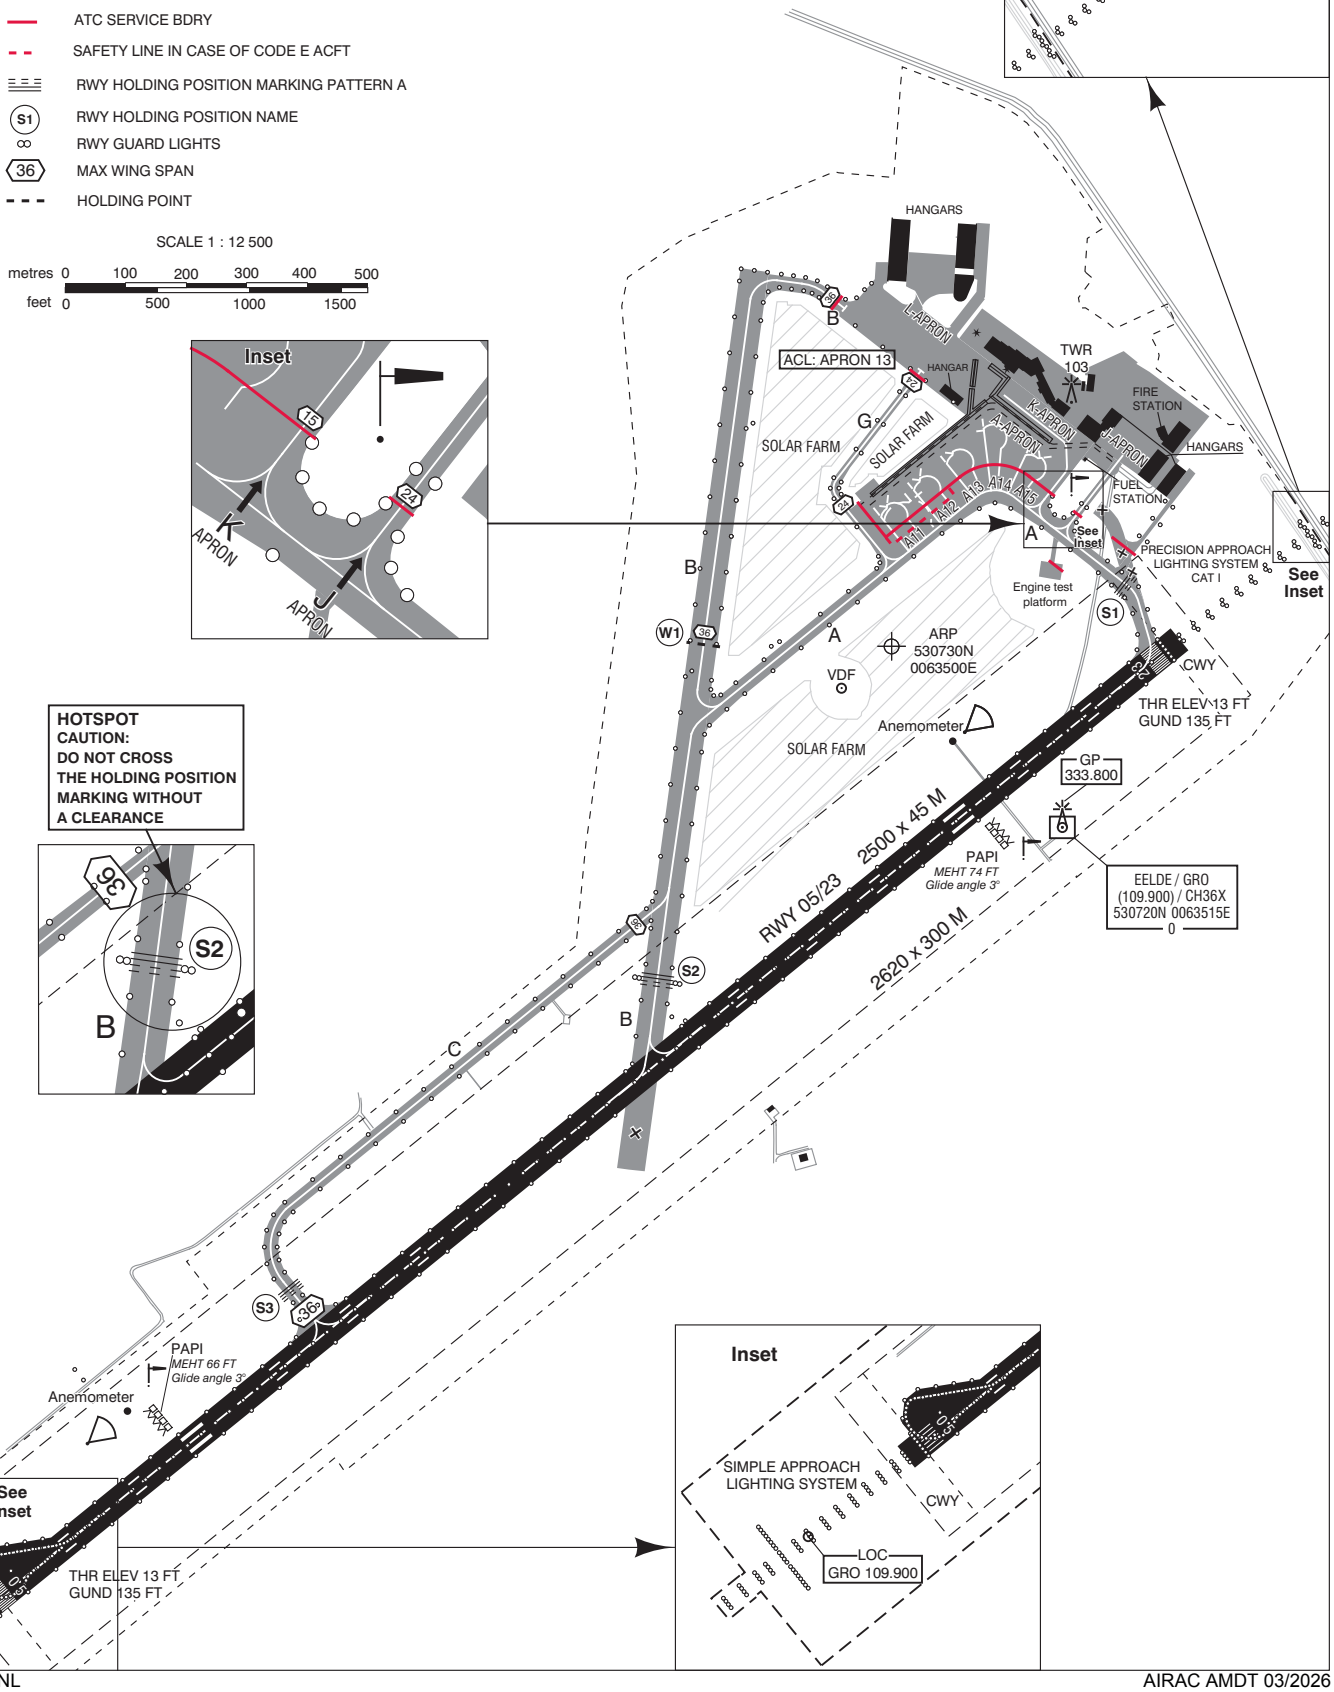

CHANGE 0326: MAGVAR 2025; fuel station; editorial.