


NOTES:
 1. Continuous descent operation.
 2. GNSS required.
 3. LOC as MNM must be available.
 4. DME required.
 5. Given EH waypoints beyond the FAF must be considered to be supplementary information.
 6. When leaving the holding proceed direct to EH578.

Altitudes / Speeds:
 When cleared for IPTAS / OKLOV / RUMER / SOPVI approach RWY 03:
 - Continue to ERSUL via the approach.
 - Switch to QNH at EH582 / SOMEM.
 - Establish a continuous descent path.
 - The MNM altitudes shall be respected.
 - Execute the ILS or LOC approach RWY 03.

APP	123.180	RAPCON South
	124.530	Eindhoven Arrival
TWR	131.005	Eindhoven Tower
	122.100	
GND	121.930	Eindhoven Ground
	121.500	General Emergency
ATIS	126.030	Eindhoven Information
LOC	109.750	EHZ
DME	CH34Y	EHZ
GP	333.050	

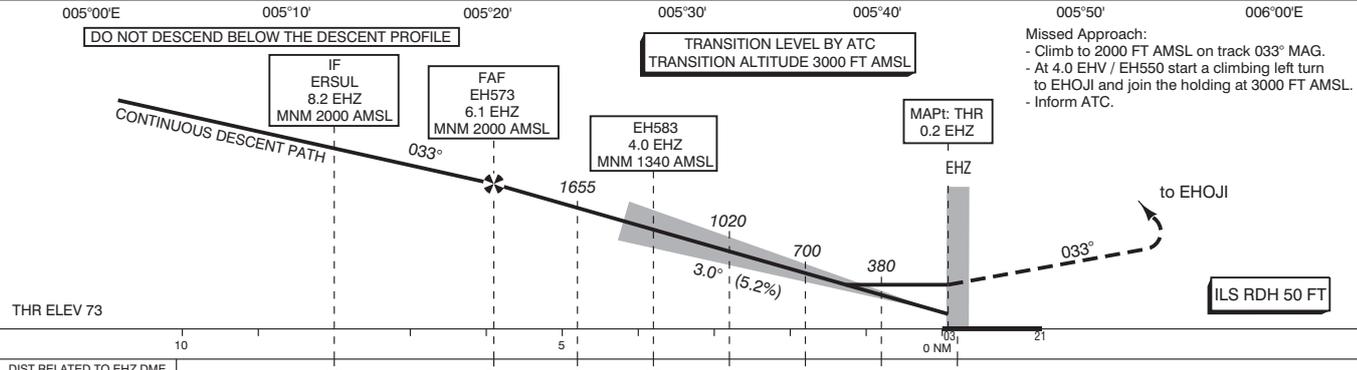

DIST RELATED TO EHZ DME	8.2	6.1	5	4.0	3	2	1	0 NM
GS IN KT	60	80	100	120	140	160	180	
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN	

OCA (OCH) ELEV THR 03: 73.3 FT				MSA BASED ON ARP				
ACFT CAT	CAT I	LOC MAPt: THR	CIRCLING	THR 03	EH586	EH587	EH588	
A	239 (165)	420 (346)	NOT ALLOWED	EH550	512627.1N 0052150.9E	511904.4N 0054701.4E	511904.4N 0054157.0E	
B	249 (175)			EH573	512137.8N 0051627.5E	511810.0N 0052624.1E	513016.1N 0055348.7E	513016.1N 0055348.7E
C	259 (185)			EH578	512656.6N 0051239.0E	513016.1N 0055348.7E	513535.5N 0055220.5E	513535.5N 0055220.5E
D	269 (195)			EH582	513719.3N 0051209.3E	513040.6N 0051015.7E	513040.6N 0051015.7E	513040.6N 0051015.7E
CEILING AND VISIBILITY MINIMA				DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET				
TAKE-OFF	DAY:	NA	NIGHT:	NA				
LANDING	DAY:		NIGHT:					