



1. Missed Approach:
 - Track 229° MAG and climb to 2000 FT AMSL.
Inform ATC.
2. Missed Approach in case of communication failure:
 - Track 229° MAG and climb to 3000 FT AMSL;
 - When reaching 3000 FT AMSL, turn right to EEL;
 - After passing EEL proceed to HECTI via EEL R-051;
 - After arriving over HECTI hold or descend to 2000 FT AMSL in an outbound turn, intercept final approach and execute the instrument approach procedure again.

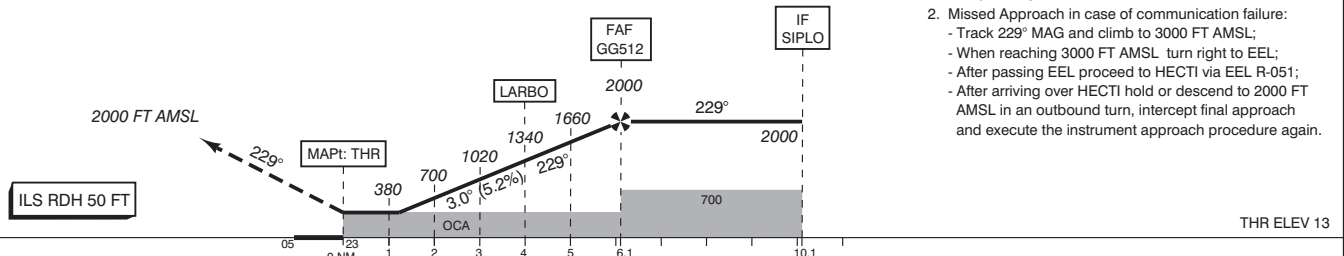

GS IN KT		60	80	100	120	140	160	180	
VERTICAL SPEED		320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN	
OCA (OCH) ELEV THR 23: 12.5 FT							MSA BASED ON EEL VOR/DME 		
ACFT CAT	LPV	RNAV/VNAV MNM TEMP -15°C	LNAV	CIRCLING*	THR 23 GG512 GG752	530729.8N 531114.8N 525946.2N			0063525.0E 0064322.6E 0061908.7E
A	263 (251)	280 (268)	440 (422)	450 (432)					
B	263 (251)	290 (278)		520 (502)					
C	263 (251)	300 (288)		620 (602)					
D	263 (251)	310 (298)		850 (832)					
CEILING AND VISIBILITY MINIMA				* Circling approaches shall be executed south-east of the AD, unless otherwise instructed by ATC.	DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET				
TAKE-OFF	DAY:	NA	NIGHT:	NA					
LANDING	DAY:		NIGHT:						

