


AMSTERDAM/Schiphol RWY 06 - 24
AERODROME OBSTACLE CHART TYPE A

DECLARED DISTANCES (INTERSECTION TAKE-OFFS)											
	RWY 06				RWY 24						
		S1			S7E	S8	S6	S5	S4	S3	
TORA	3439	2596			3435	3266	3245	3205	2611	1981	
TODA	3499	2656			3495	3326	3305	3265	2671	2041	
ASDA	3439	2596			3435	3266	3245	3205	2611	1981	
LDA	3195				3439						

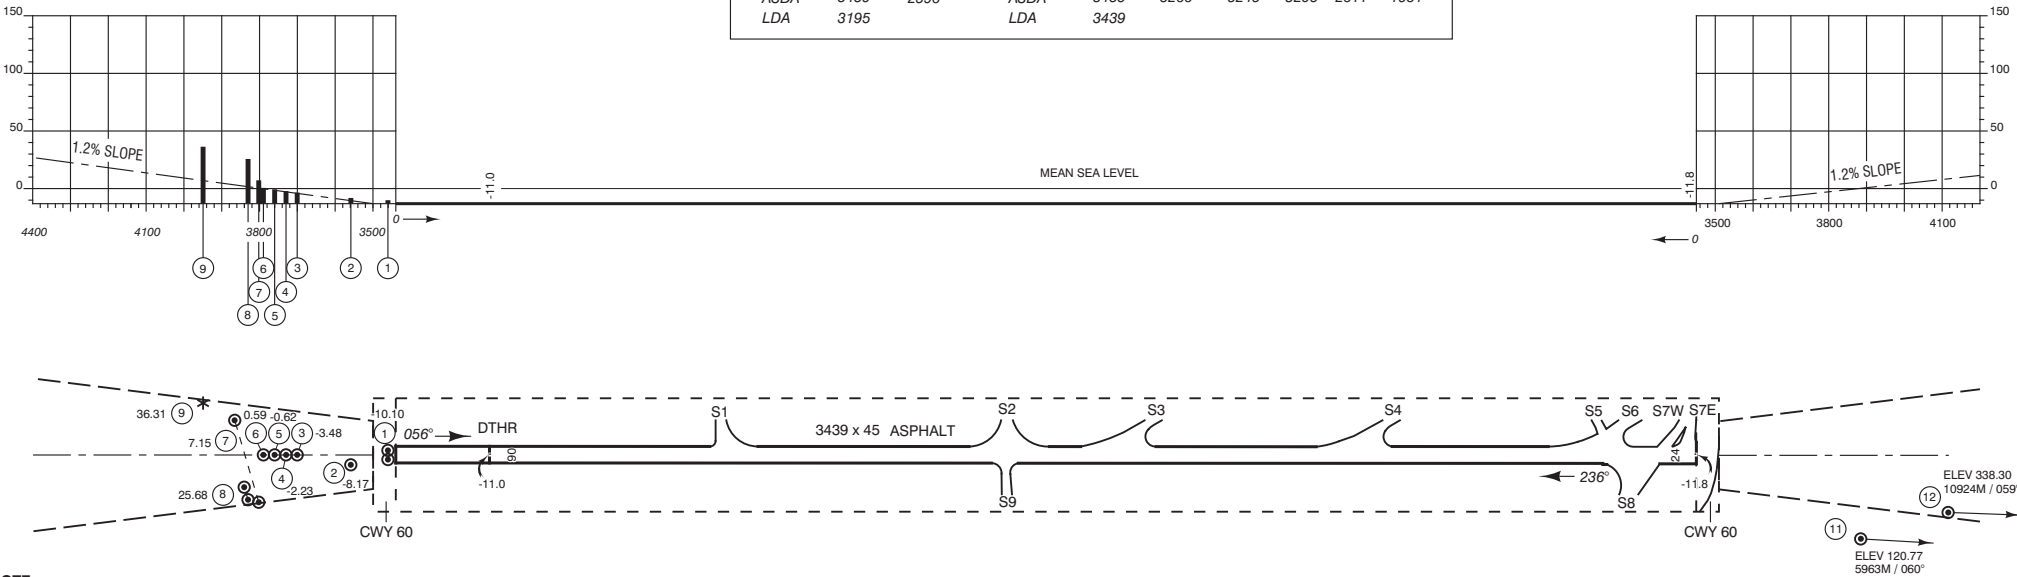

NOTE:
The datum line from which the reduced RWY declared distances for take-off should be determined is defined by the intersection of the downwind edge of the specific TWY with the RWY edge as shown in the diagram in EHAM AD 2.23.4.
The loss, if any, of RWY length due to alignment of the ACFT prior to take-off should be taken into account by the operators for the calculation of the ACFT's take-off weight (Annex 6, Part 1, paragraph 5.2.8).
If an intersection take-off will take place from an intersection with an intersection angle of 30° (rapid exit TWY), and the TWY centre line is followed until the RWY centre line, there is a loss of line-up distance of at least 200 M (see EHAM AD 2.23.4.).

MAGNETIC VARIATION: 2° E (2025)

DIRECTIONS ARE MAGNETIC

ELEVATIONS IN FEET

DIMENSIONS IN METRES

(15) IDENTIFICATION NUMBER

* TREE

⊙ POLE, TOWER, SPIRE, ANTENNA, CHIMNEY

■ BUILDING OR LARGE STRUCTURE

⦶ (17) TRAFFIC (IN PLAN)

⋯ TRAFFIC (IN PROFILE)

⊗ WINDMILL