
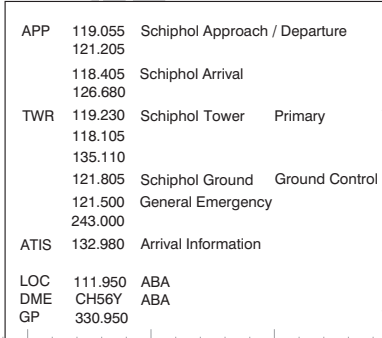


GS IN KT		100		120		140		160		180		200		220	
TIME AND VERTICAL SPEED		530 FT/MIN		635 FT/MIN		745 FT/MIN		850 FT/MIN		955 FT/MIN		1060 FT/MIN		1165 FT/MIN	
OCA (OCH) ELEV THR 36R: -11.1 FT													MSA BASED ON SPL VOR/DME 		
ACFT CAT	CAT III supported		LOC MAPT: THR	CIRCLING*	THR 36R 521727.0N 0044638.5E										
	CAT I	CAT II			AM160 521330.0N 0045418.0E										
A	198 (209)	(59)	430 (440)	630 (641)	AM161 520624.0N 0045338.5E										
B	208 (219)	(69)		790 (801)	AM162 520635.2N 0044825.7E										
C	217 (228)	(82)		890 (901)	AM163 523018.0N 0044750.5E										
D	227 (238)	(99)		900 (911)	AM635 521327.7N 0044616.3E										
DL	227 (238)	(99)			AM636 521118.5N 0044604.4E AM637 522224.2N 0044706.0E										
CEILING AND VISIBILITY MINIMA					* Circling procedures to and landing on RWY 18L and 36L is not permitted, except in case of an emergency. DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET AMSL										
TAKE-OFF	DAY:	NA		NIGHT:							NA				
LANDING	DAY:	NA		NIGHT:							NA				

