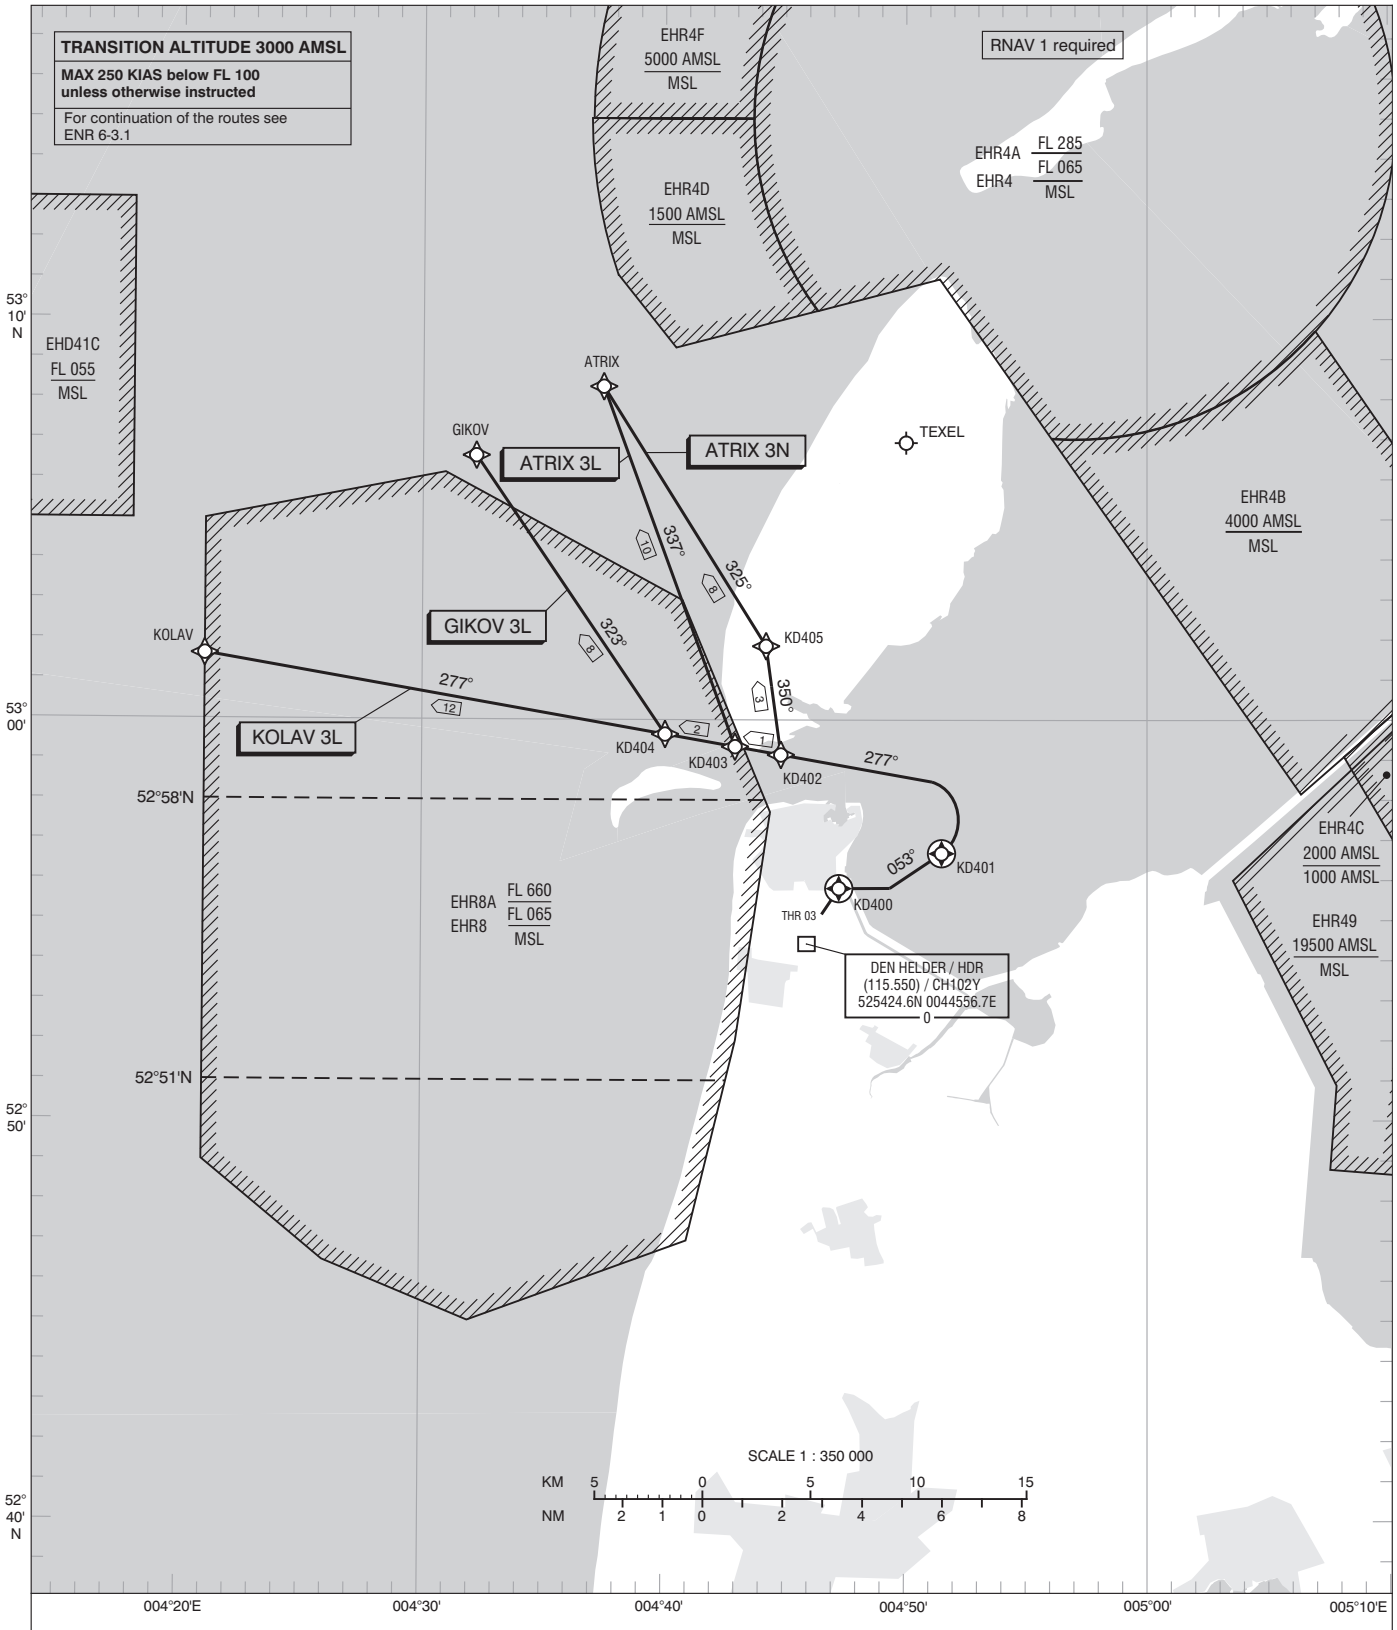

NOTES:

1. Noise abatement procedures for off-shore helicopters only.
2. For noise abatement maintain rate of climb of 1000 FT/MIN upto 2000 FT, if possible.

KD400	525547.7N 0044716.0E
KD401	525640.2N 0045130.6E
KD402	525907.7N 0044451.5E
KD403	525919.8N 0044257.5E
KD404	525938.3N 0044003.9E
KD405	530150.3N 0044414.0E

TWR	120.130	De Kooy Tower
APP	124.230	De Kooy Arrival
ATIS	133.010	De Kooy Information

MSA BASED ON HDR DME



DISTANCES IN NM
ALTITUDES IN FEET
DIRECTIONS ARE MAGNETIC

AVERAGE VAR 2° E (2025)

SID
ATS ROUTE

CHANGE 0626: MSA; editorial.

© LVNL