


NOTES:
1. EGNOS CH 69781 E03A.
2. PAPI to be ignored.


RNP APCH required

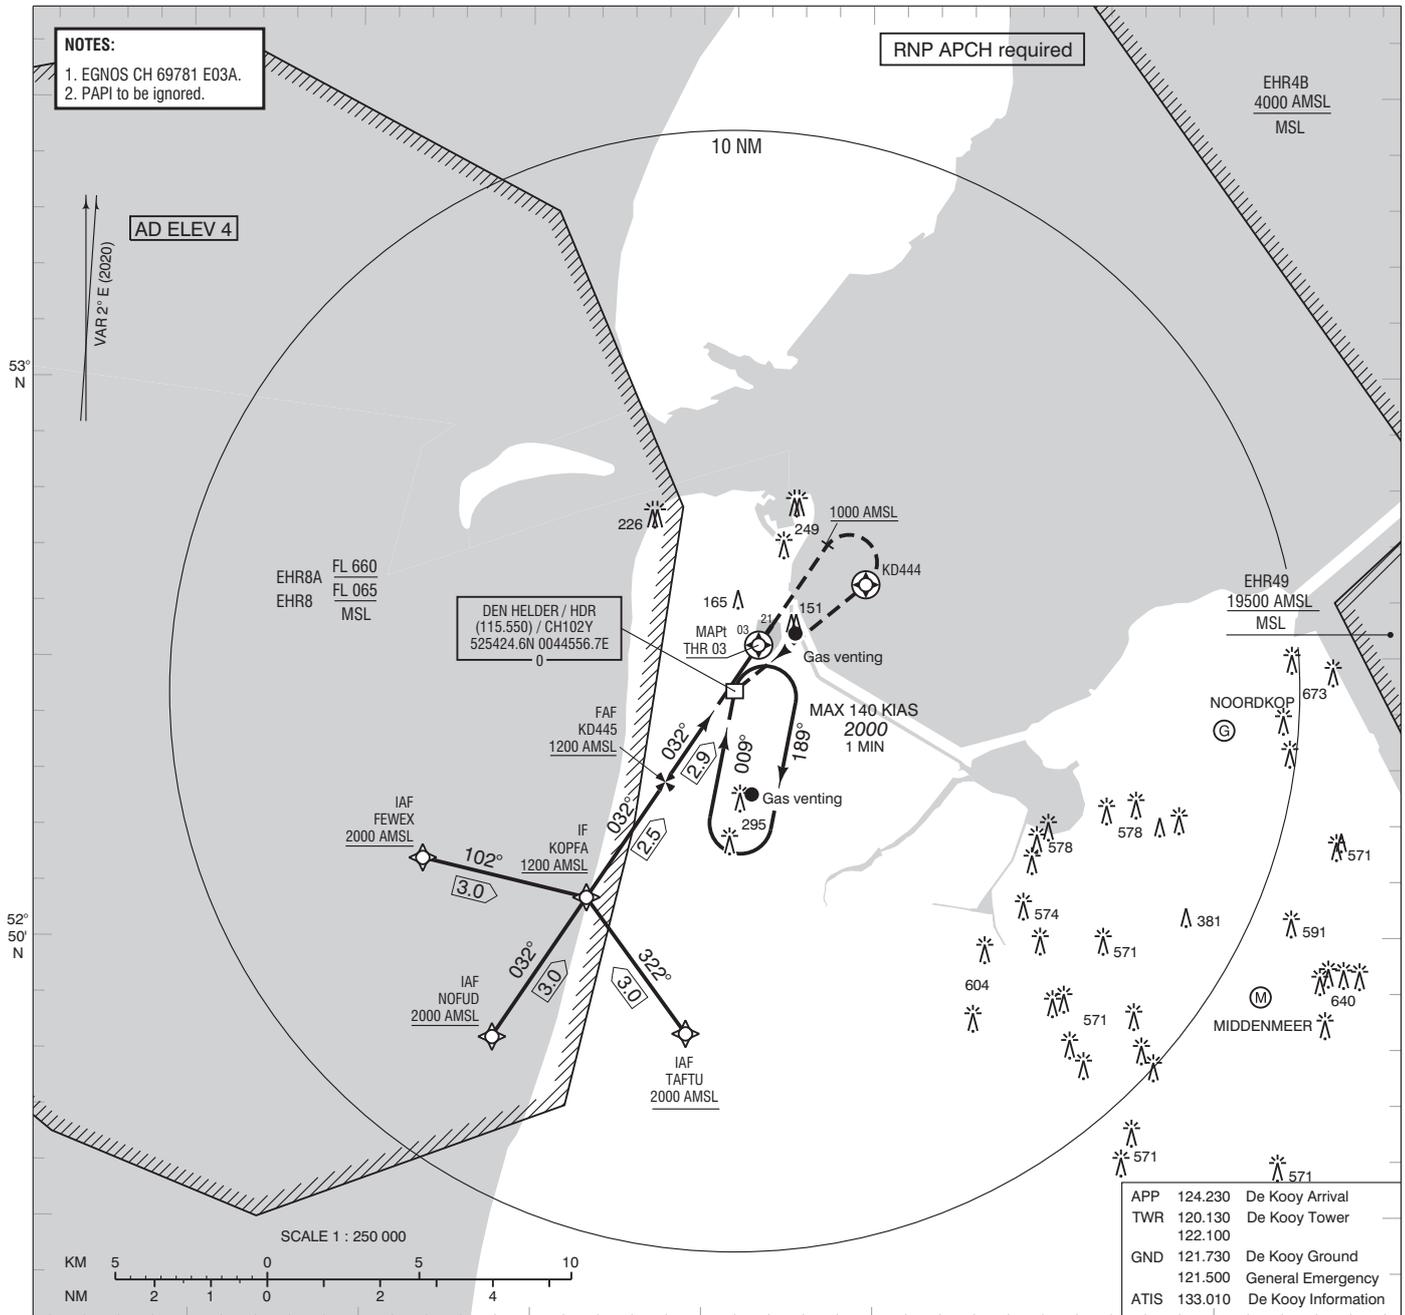

APP	124.230	De Kooy Arrival
TWR	120.130	De Kooy Tower
GND	121.730	De Kooy Ground
	121.500	General Emergency
ATIS	133.010	De Kooy Information

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

Missed approach
 - At MAP1 maintain final track 032° MAG and climb to 2000 FT AMSL.
 - At 1000 FT AMSL turn right to KD444.
 - At KD444 turn right to HDR and join the holding at 2000 FT AMSL.
 - Inform ATC.

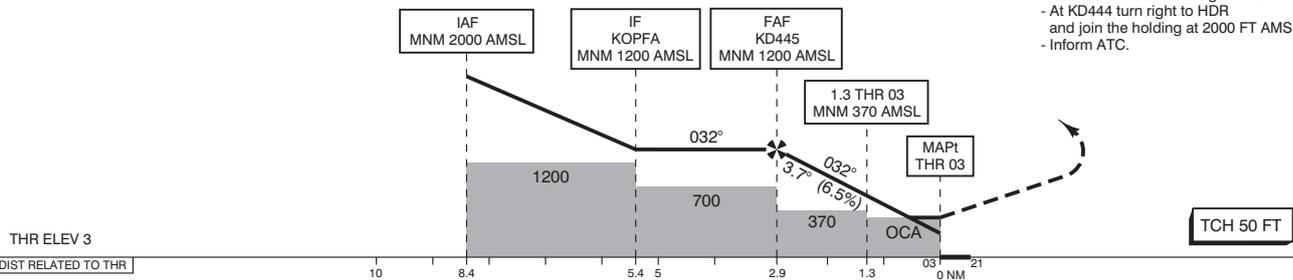

GS IN KT	60	80	100	120	140
VERTICAL SPEED	395 FT/MIN	530 FT/MIN	660 FT/MIN	790 FT/MIN	920 FT/MIN

OCA (OCA) ELEV THR 03: 3 FT

ACFT CAT	LPV	LNAV/VNAV MNM TEMP -15°C	LNAV	CIRCLING*	* - Circling NW of RWY and extended RWY centreline prohibited. - Overflying the gas venting site situated APPR1000 M east of the RWY must be avoided. - PAPI 3° - Not aligned with instrument procedure vertical path.
H	203 (200)	NOT ALLOWED	350 (347)	510 (506)	
DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET					
CEILING AND VISIBILITY MINIMA					
TAKE-OFF	DAY:	NA	NIGHT:	NA	
LANDING	DAY:	NA	NIGHT:	NA	

