



NOTES:
1. EGNOS 57187 E21B.
2. PAPI to be ignored.

RNP APCH required

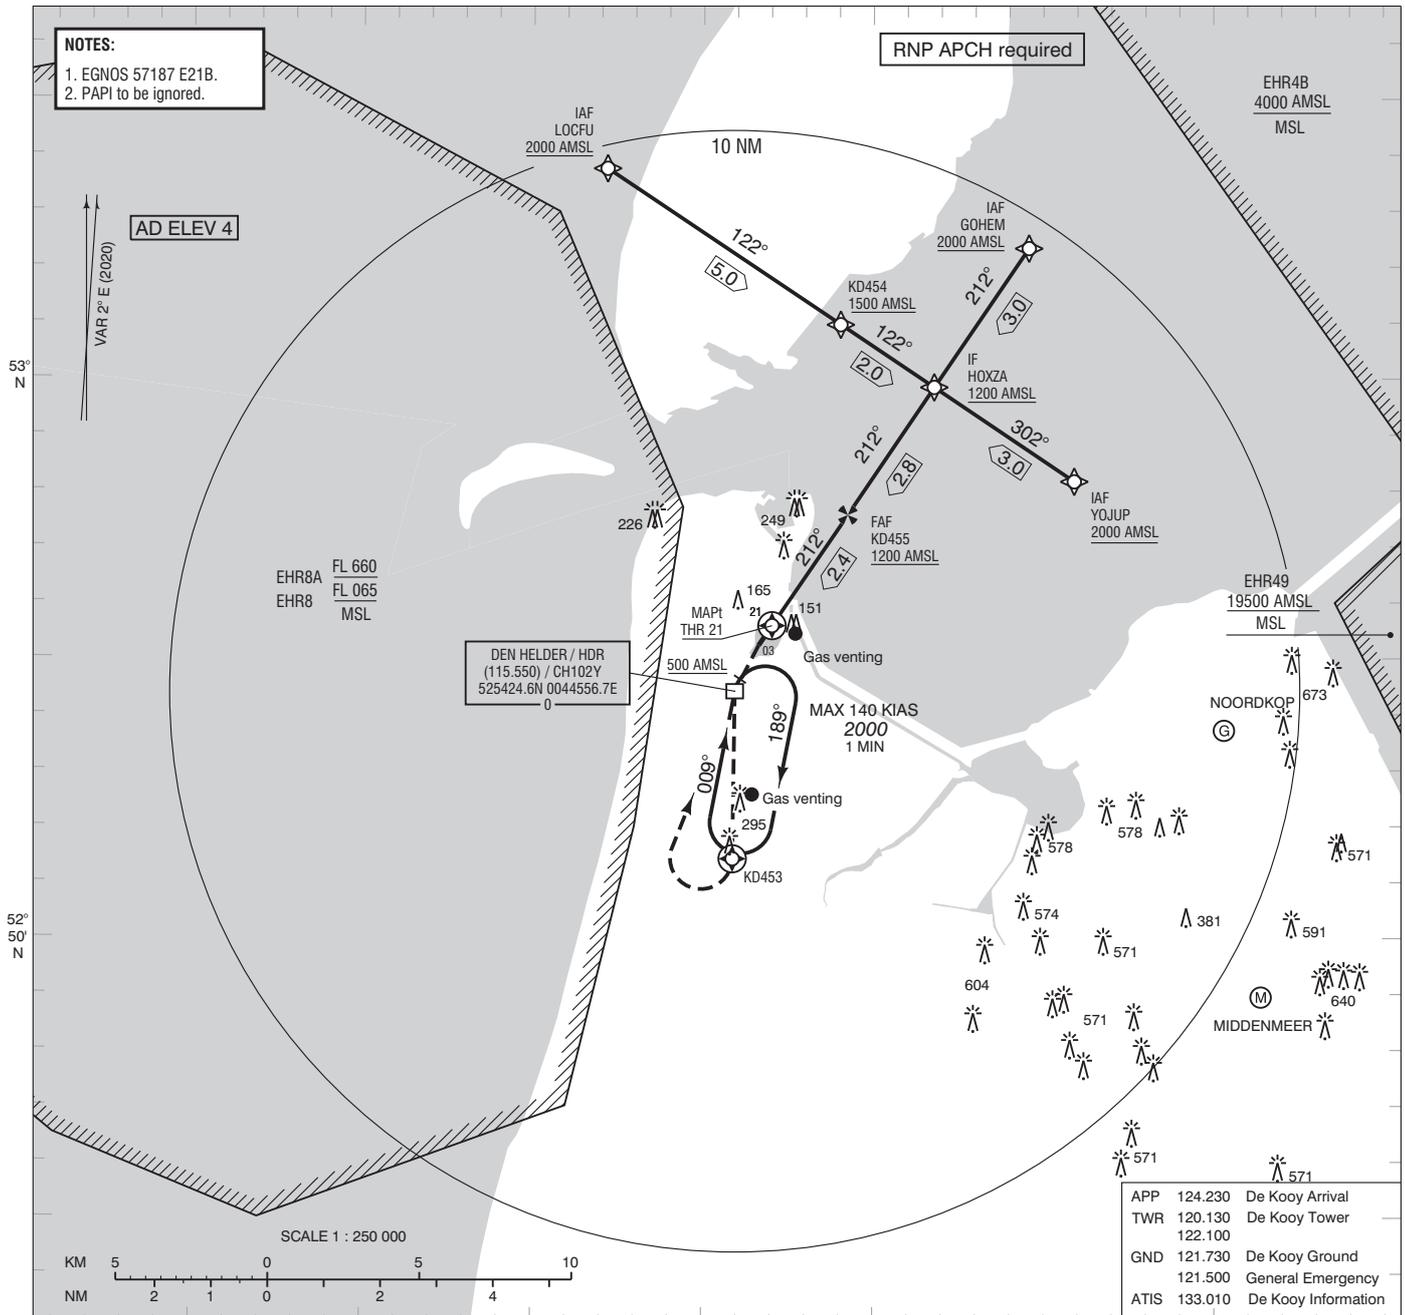

Missed approach
- At MAPt maintain final track 212° MAG and climb to 2000 FT AMSL.
- At 500 FT AMSL turn left to KD453.
- At KD453 turn right to HDR and join the holding at 2000 FT AMSL.
- Inform ATC.

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

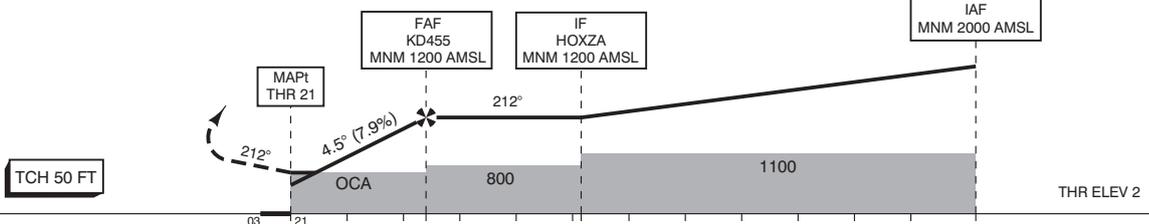

DIST RELATED TO THR	03	0.21	2.4	5.2	10	12.2
GS IN KT	60	80	100	120	140	
VERTICAL SPEED	480 FT/MIN	640 FT/MIN	795 FT/MIN	955 FT/MIN	1115 FT/MIN	

OCA (OCH) ELEV THR 21: 2 FT					* - Circling NW of RWY and extended RWY centreline prohibited. - Overflying the gas venting site situated APRX1000 M east of the RWY must be avoided. - PAPI 3° - Not aligned with instrument procedure vertical path.	THR 21 525535.1N 0044702.0E KD453 525125.0N 0044553.1E KD454 530057.9N 0044902.5E KD455 525734.4N 0044914.9E
ACFT CAT	LPV	LNAV/VNAV MNM TEMP -15°C	LNAV	CIRCLING*		
H	222 (220)	NOT ALLOWED	430 (428)	510 (506)		
CEILING AND VISIBILITY MINIMA						
TAKE-OFF	DAY:	NA	NIGHT:	NA	DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET	
LANDING	DAY:		NIGHT:			

